

SpeedCure 8002

Feb-2022 v.3

Technical Data Sheet

General Information


SpeedCure 8002 is a Norrish Type I photoinitiator from the oxime ester family, with absorption maximum at 340 nm. SpeedCure 8002 provides low yellowing when used at 0.5-5 wt% in UV curable filter resist formulations.

Chemical Name


1-[9-Ethyl-6-(2-methylbenzoyl)-9H-carbazol-3-yl]-3-cyclopentylpropanone-1-(O-acetyloxime)

CAS Number	EC Number	Mol. Wt.
1227375-90-7	n/a	494.6

Structure

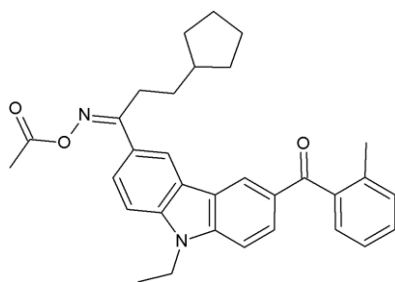

UV Spectrum

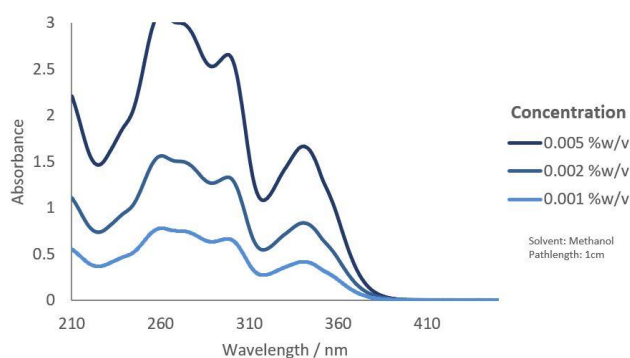

Specification (LAM 404)

Appearance :	White to off-white solid
Purity (HPLC) :	≥ 99.0 %area
Melting Range :	119.0 - 127.0 °C
Loss on Drying (80°C, 2 hours) :	≤ 0.5 %w/w

Applications

- Pigmented systems
- LED curing
- Electronics

Storage and Handling

Stable for at least 2 year(s) at 20°C in a sealed container in the dark. A Safety Data Sheet is available on request.

Transport Classification

(EUROPE AND USA) NON-HAZARDOUS

Global Inventories

ECL, TSCI

Disclaimer: Please consult Arkema's disclaimer regarding the use of our products on <https://www.arkema.com/en/products/product-safety/disclaimer/>