

SpeedBlock UV-9

Dec-2020 v.6

Technical Data Sheet

General Information


SpeedBlock UV-9 is a highly efficient benzophenone type UV absorber for use in polymer processing, coatings and adhesives. SpeedBlock UV-9 is ideally suited for exterior coatings and is typically used at 0.1 - 5.0% depending on the processing conditions and end application.

Chemical Name


2-Hydroxy-4-methoxybenzophenone

CAS Number	EC Number	Mol. Wt.
131-57-7	205-031-5	228.2

Structure

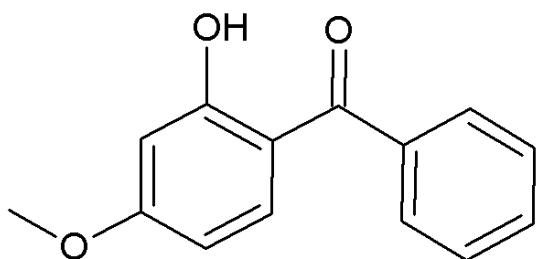

UV Spectrum

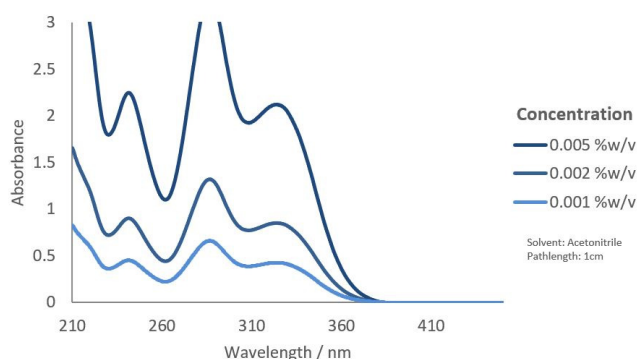

Specification (LAM 221)

Appearance :	Pale yellow powder
Assay :	≥ 99.0 %
Melting Point :	≥ 62.0 °C
Loss on Drying (%w/w, 60°C, 3 hours under vacuum) :	≤ 1.0 %w/w

Applications

- Clear coatings
- Pigmented systems
- Flame retardants
- Adhesives

Storage and Handling

Stable for at least 2 year(s) at 20°C in a sealed container in the dark. A Safety Data Sheet is available on request.

Transport Classification

(EUROPE AND USA) HAZARDOUS
Class 9 Packing Group III UN 3077

Global Inventories

REACH, EINECS, TSCA, DSL, AICS, NZIoC, IECSC, CSCL, ECL, PICCS, TSCI

Disclaimer: Please consult Arkema's disclaimer regarding the use of our products on <https://www.arkema.com/en/products/product-safety/disclaimer/>

LAMBSON
SPEEDBLOCK
BY ARKEMA