

# UviCure S105E

Aug-2020 v.7

## Technical Data Sheet

### General Information


UviCure S105E is a high purity, low viscosity difunctional cycloaliphatic epoxide resin which gives clear, hard, glossy coatings when polymerised with onium salt photoinitiators.

### Chemical Name

7-oxabicyclo[4.1.0]hept-3-ylmethyl 7-oxabicyclo[4.1.0]heptane-3-carboxylate

CAS Number	EC Number	Mol. Wt.
2386-87-0	219-207-4	252.3

### Structure

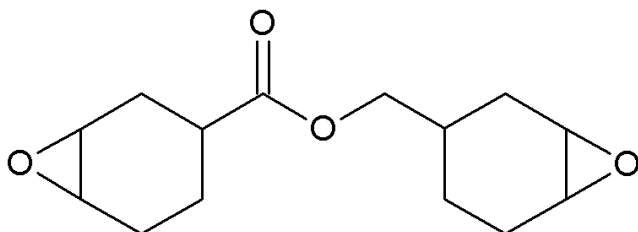

### Specification (LAM 341)

Appearance :	Colourless to pale yellow clear liquid
Purity (GC) :	≥ 97.0 %w/w
Viscosity (LV, Sp31, 60rpm @ 25°C) :	220.0 - 350.0 mPa.s
Water Content (Karl Fischer) :	≤ 0.05 %w/w
Epoxide Equivalent :	126.0 - 135.0 g/mol
APHA (Neat) :	< 50.0
Total Chloride (Combustion IC) :	≤ 100.0 ppm

### Applications

- LED curing
- Metal coatings
- 3D printing
- Adhesives
- Composites
- Clear coatings
- Pigmented systems
- White pigmented systems
- Black pigmented systems
- Glass coatings

### Storage and Handling

Stable for at least 2 year(s) at 20°C in a sealed container in the dark. A Safety Data Sheet is available on request.

### Global Inventories

REACH, EINECS, TSCA, DSL, AICS, NZIoC, IECSC, CSCL, ECL, PICCS, TSCI

### Transport Classification

(EUROPE AND USA) NON-HAZARDOUS

Disclaimer: Please consult Arkema's disclaimer regarding the use of our products on <https://www.arkema.com/en/products/product-safety/disclaimer/>

LAMBSON™  
UVICURE  
BY ARKEMA